

H+H Vertical Wall Panels. 4N/mm² compressive strength.

Drylining on Dabs

H+H UK Ltd Jumbo Blok (630x250x100) cut infill block between joists

I-section timber beam

Packer pre-installed to cassette joists to make up 250mm dimension, any remaining gaps fully filled with mortar.

Staifix HRT Wall ties (or other AD-E type A ties) - ref H+H UK Ltd detail VED007


Minimum 100mm

Joist end packing

Separating wall cavity fully filled with mineral fibre insulation of 40kg/m³ or less density

REV.	DATE	DESCRIPTION	BY.
01.	3/3/17.	Minor mods.	MAB.

These details have been produced for guidance only. It is the responsibility of the building designer to ensure that the details shown are compatible with the overall building design and will satisfy the relevant parts of the Building Regulations applicable before they are adopted into the project design.

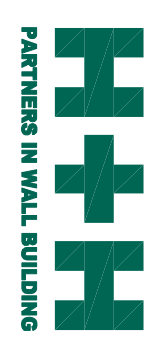

H+H UK Limited
 Technical Services Dept.
 Celcon House
 Ighiteam, Sevenoaks
 Kent, TN15 9HZ
 Tel: +44 (0)1732 880580
 E-mail: tsd@hncelcon.co.uk

TITLE
Vertical Wall Panel
Separating wall floor section

DWG No.
VED010

DRAWN BY
MAB

CHECKED BY
SJK

DATE
15/12/15

SCALE
1:10

REV.NO.
01