

Jumbo Bloks and Multi Plates



Multi Plate

Jumbo Blok

H+H Jumbo Bloks offer beneficial productivity, with as few as 6.3 blocks completing 1m² of walling. Their use with either traditional mortar or thin layer construction enhances the speed of build on site.



H+H Multi Plates are a new generation of aircrete products that build on the efficiency of thin layer construction.

At over 2 times the size of a traditional (440 x 215mm) block, Multi Plates are laid using Celfix mortar and the Thin-Joint System and offer significant savings in site productivity.

Applications

- Internal and external leaf of cavity walls
- Separating walls (except Solar Grade)
- Flanking walls
- Partitions
- Multi storey buildings



Jumbo Blok

Multi Plate



H+H UK will always endeavour to reflect our product range and technical information as accurately as possible. We may however, need to update both from time to time. Please check with either our Sales or Technical departments to obtain the latest information prior to specification and purchase.

Jumbo Bloks and Multi Plates

Face size	Jumbo Blok 630mm x 250mm		Multi Plates 630mm x 350mm
Block Thickness (mm)	100	140	100
Solar Grade Weight (kg) [†]	9	13	-
Standard Grade Weight (kg) [†]	12	17	17
High Strength Grade Weight (kg) [†]	14	20	20
Super Strength Grade Weight (kg) [†]	14	20	20

[†] Blocks weights at typical moisture content when laid. (Some manufacturers may quote weights which have not allowed for this.)


All shaded areas indicate that the product is a stock item at all factories, other sizes can be made to order subject to minimum quantities.

• Compressive strengths quoted are to the European Standard BS EN 771-4.

	Solar Grade	Standard Grade	High Strength Grade	Super Strength Grade
Compressive Strength	2.9N/mm ² *	3.6N/mm ² *	7.3N/mm ² *	8.7N/mm ² *
Thermal Conductivity	0.11 W/mK	0.15 W/mK	0.18 W/mK	0.18 W/mK
Density	460 kg/m ³	600 kg/m ³	730 kg/m ³	730 kg/m ³

Pack information	Jumbo Blok 630mm x 250mm		Multi Plates 630mm x 350mm
Block Thickness (mm) = T	100	140	100
Coverage per pack (m ²) – 2mm joint	7.6	5.1	8.0
Number of blocks per pack	48	32	36
Pack width (mm) = T	1200	1120	1200
Pack Weight – Solar Grade (kg)*	440	410	-
Pack Weight – Standard Grade (kg)*	620	535	605
Pack Weight – High Strength/Super Strength (kg)*	720	625	705

* Pack weight excludes pallet.

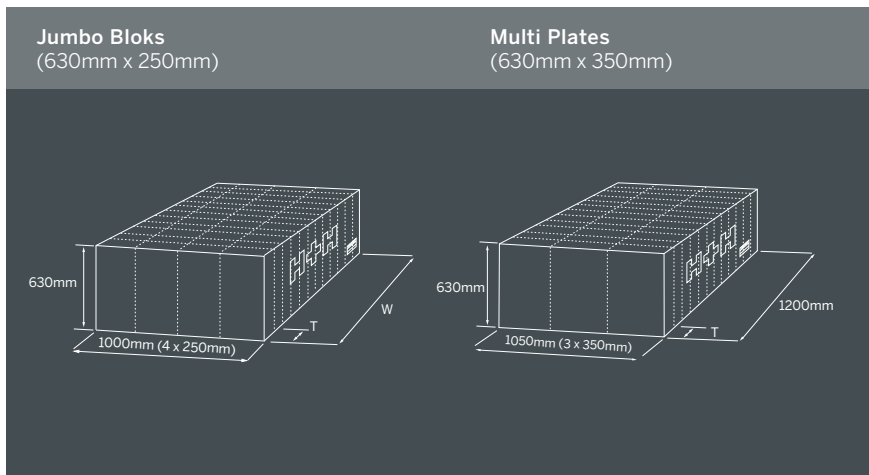

For further information and to check our most up-to-date product range please visit our website www.hhcelcon.co.uk or contact the following departments:

Sales

For sales enquiries or to find your local stockist please contact
 Tel: 01732 886444
 Fax: 01732 887013

Technical

For technical enquiries please contact
 Tel: 01732 880580
 Fax: 01732 887013
 Email: technical.services@hhcelcon.co.uk